


- NOTE:
1. INSERTION LOSS < 0.3dB.
  2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
  3. DURABILITY: 500 CYCLES.
  4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
  5. TENSILE STRENGTH: 10Kg.
  6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

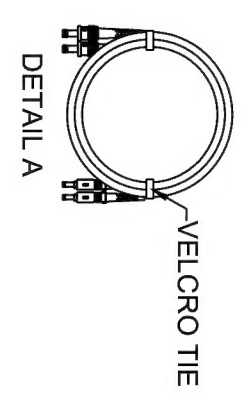


**ATF** Fiber Optical Patchcord

SC/PC to ST/PC Duplex Multimode 62.5/125, OM1, Ø3.0mm xxM-RoHS

Model: xxxxxx -xxxxxx

Lot number: \_\_\_\_\_

Performance: (@23°C) A=850/1310±20nm




SEE TABLE "DESCRIPTION 2"

Serial No		Insertion Loss ≤ 0.3dB
A	850nm	1310nm
B		
C		
D		


Kymmmmmmm

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_



DETAIL B

Y: Year, mm: Month  
xxxxx: Serial Number

ITEM	QTY	PART NO.	DESCRIPTION	UNIT:	DATE:
5	2PCS		SC DUST COVER, CLEAR.		
4	2SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.		
3	2PCS		ST DUST COVER, CLEAR.		
2	2SETS		CONNECTOR: ST/PC MM, WITH BLACK & RED BOOT.		
1	1PC		CABLE: MULTIMODE, 62.5/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.		
PART LIST				SALE BY	DATE

**ATF**

DRAWN BY Catherine

CHECKED BY

APPROVED BY

DATE

UNIT: Inches[mm]

DATE: 2007/10/4

DATE

DATE

TITLE: PATCHCORD SC-ST MULTIMODE DUPLEX 62.5/125, OM1, 3.0mm, ORANGE.

CUSTOMER

DRAWING NO. PK709003

CUSTOMER PART NO. RL20\*\*

Ref. NO.

REV. A